



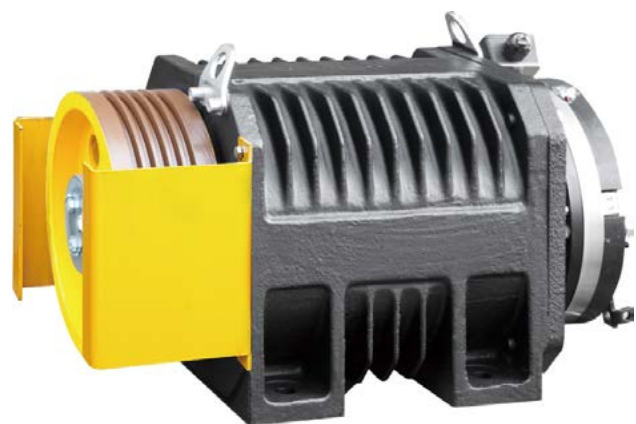

► **RGL00**  
Elevator traction machine

Voltage : 380V  
Suspension : 2 : 1  
PZ300B Brake : DC110v 1.6A  
Weight : 140kg  
Max.Static Load : 1600kg

| Spec            | Load<br>(kg) | Lift Speed<br>(m/s) | Sheave<br>Diam(mm) | Rope Sheave<br>(mm) | Current<br>(A) | Torque<br>(Nm) | Rated Speed<br>(rpm) | Frequency<br>(Hz) | Power<br>(kW) | Pole | Rating  | INS.Class | IP Code |
|-----------------|--------------|---------------------|--------------------|---------------------|----------------|----------------|----------------------|-------------------|---------------|------|---------|-----------|---------|
| RGL00-31P0B 320 | 320          | 1.0                 | Φ240               | 4xΦ6.5x12           | 5.4            | 125            | 159                  | 26.5              | 2.1           | 20   | S5(40%) | F         | IP41    |
| RGL00-31P5B 320 | 320          | 1.5                 | Φ240               | 4xΦ6.5x12           | 8              | 125            | 239                  | 39.8              | 3.1           | 20   | S5(40%) | F         | IP41    |
| RGL00-31P6B 320 | 320          | 1.6                 | Φ240               | 4xΦ6.5x12           | 8              | 125            | 255                  | 42.5              | 3.3           | 20   | S5(40%) | F         | IP41    |
| RGL00-31P7B 320 | 320          | 1.75                | Φ240               | 4xΦ6.5x12           | 8.6            | 125            | 279                  | 46.5              | 3.7           | 20   | S5(40%) | F         | IP41    |
| RGL00-41P0B 450 | 450          | 1.0                 | Φ240               | 5xΦ6.5x12           | 8.6            | 175            | 159                  | 26.5              | 3             | 20   | S5(40%) | F         | IP41    |
| RGL00-41P5B 450 | 450          | 1.5                 | Φ240               | 5xΦ6.5x12           | 10.9           | 175            | 239                  | 39.8              | 4.5           | 20   | S5(40%) | F         | IP41    |
| RGL00-41P6B 450 | 450          | 1.6                 | Φ240               | 5xΦ6.5x12           | 10.9           | 175            | 255                  | 42.5              | 4.7           | 20   | S5(40%) | F         | IP41    |
| RGL00-41P7B 450 | 450          | 1.75                | Φ240               | 5xΦ6.5x12           | 12             | 175            | 279                  | 46.5              | 5.1           | 20   | S5(40%) | F         | IP41    |

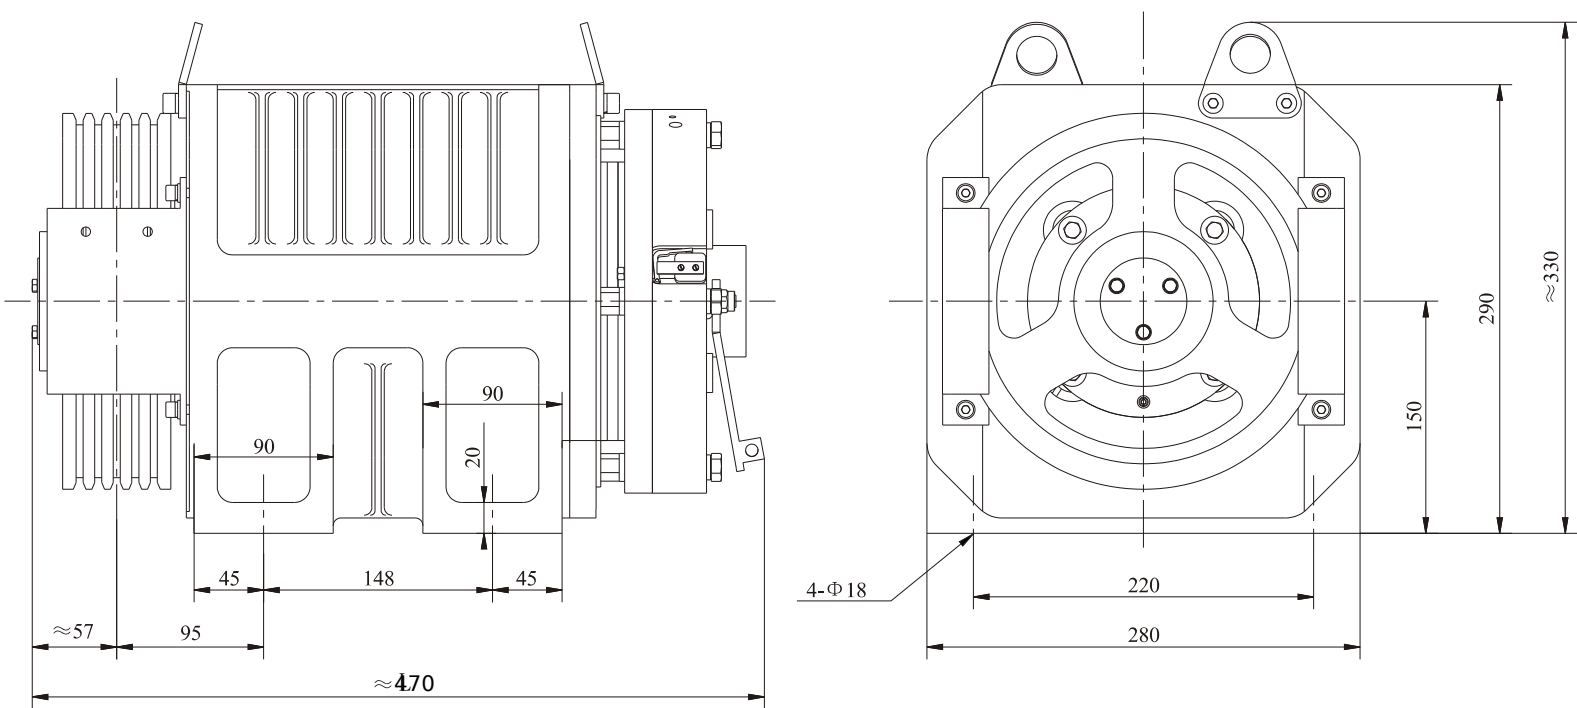

REMARK

The machine can be configured with the remote manual brake release with 4-meter cable.