




► **RGL30**
Elevator traction machine

Voltage : 380V
Suspension : 2 : 1
SPZ800B Brake : DC110V 2×1.5A
Weight : 455kg
Max.Static Load : 4500kg

Spec	Load (kg)	Lift Speed (m/s)	Sheave Diam(mm)	Rope Sheave (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (kW)	Pole	Rating	INS.Class	IP Code
RGL30-131P0B 1350	1350	1.0	Φ320	9×Φ8×12	22.8	735	119	19.9	9.2	20	S5(40%)	F	IP41
RGL30-131P5B 1350	1350	1.5	Φ320	9×Φ8×12	33	735	179	29.8	13.8	20	S5(40%)	F	IP41
RGL30-131P6B 1350	1350	1.6	Φ320	9×Φ8×12	33	735	192	32	14.8	20	S5(40%)	F	IP41
RGL30-131P7B 1350	1350	1.75	Φ320	9×Φ8×12	36.8	735	209	34.8	16.1	20	S5(40%)	F	IP41
RGL30-161P0B 1600	1600	1.0	Φ320	10×Φ8×12	27	870	119	19.9	10.8	20	S5(40%)	F	IP41
RGL30-161P5B 1600	1600	1.5	Φ320	10×Φ8×12	39	870	179	29.8	16.3	20	S5(40%)	F	IP41
RGL30-161P6B 1600	1600	1.6	Φ320	10×Φ8×12	39	870	192	32	17.5	20	S5(40%)	F	IP41
RGL30-161P7B 1600	1600	1.75	Φ320	10×Φ8×12	43.5	870	209	34.8	19	20	S5(40%)	F	IP41

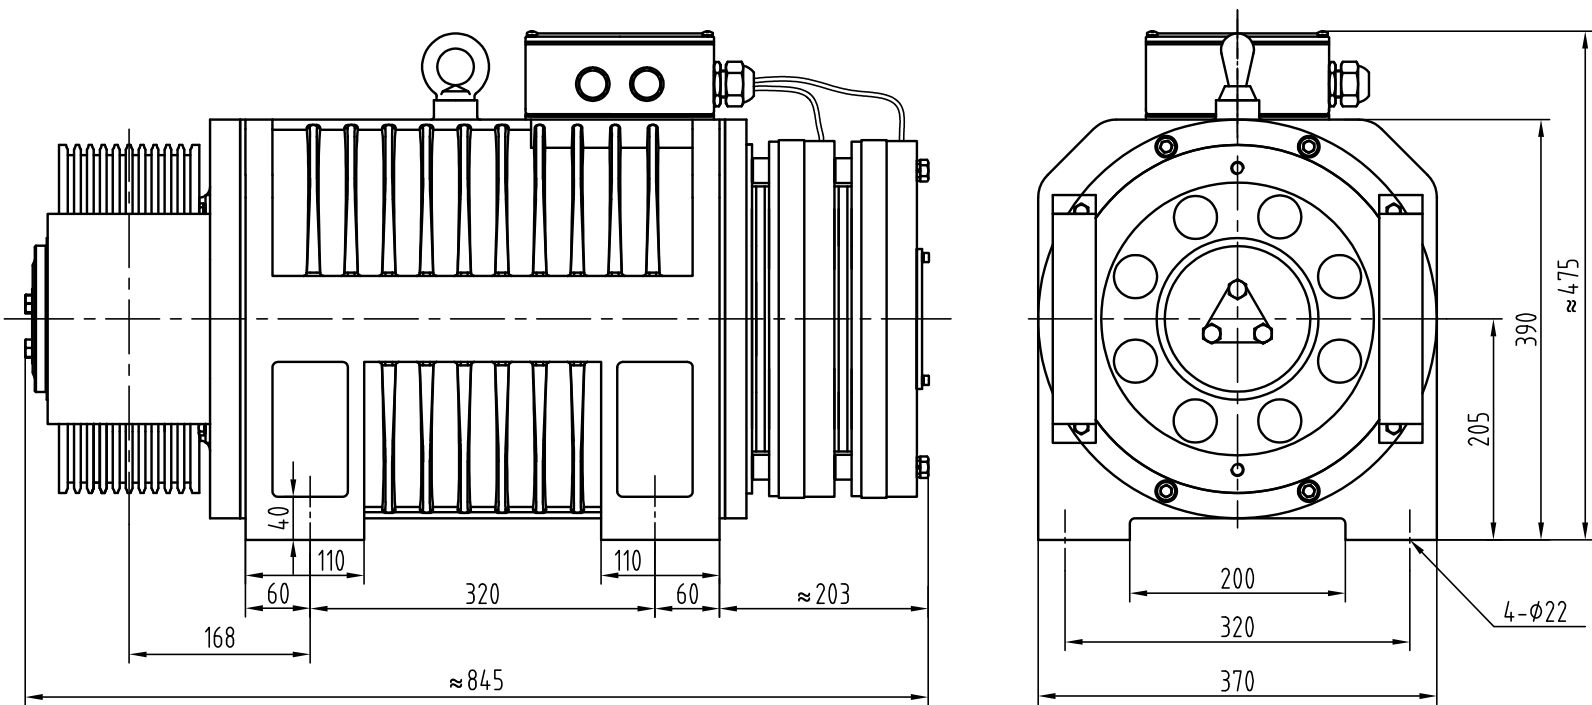

REMARK
This machine is not equipped with manual brake release. Only electrical brake release is available.