



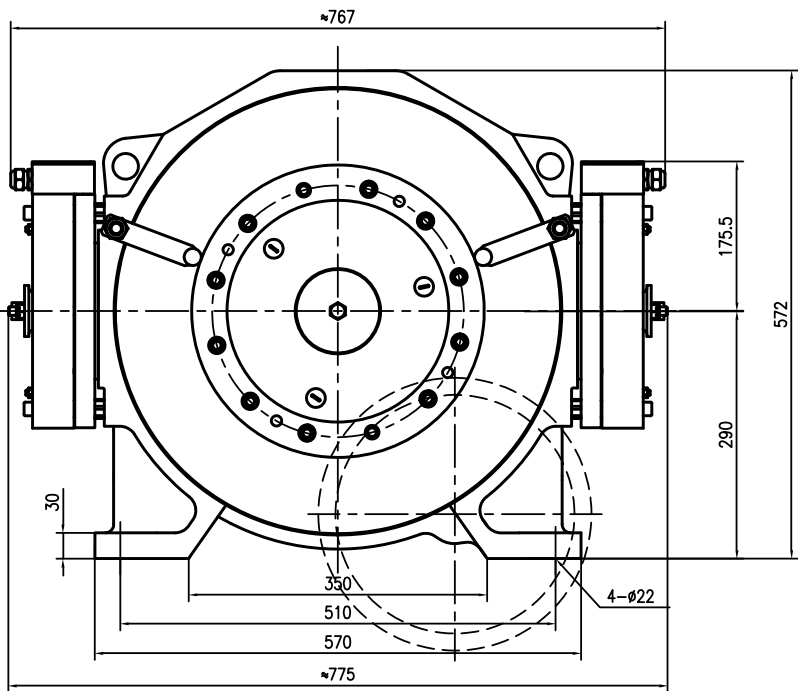

► **SGL21A**
Elevator traction machine

Voltage : 380V
Suspension : 2 : 1
FZD12AB Brake : DC110V 2×1.0A
Weight : 350kg
Max.Static Load : 3000kg

Spec	Load (kg)	Lift Speed (m/s)	Sheave Diam(mm)	Rope Sheave (mm)	Current (A)	Torque (Nm)	Rated Speed (rpm)	Frequency (Hz)	Power (kW)	Pole Rating	INS.Class	IP Code
SGL21A-111P0 1150	1150	1.0	Φ340	8×Φ8×12	17.2	650	112	29.9	7.6	32 S5(40%)	F	IP41
SGL21A-111P5 1150	1150	1.5	Φ340	8×Φ8×12	26.3	650	168	44.8	11.4	32 S5(40%)	F	IP41
SGL21A-111P6 1150	1150	1.6	Φ340	8×Φ8×12	26.3	650	180	48	12.3	32 S5(40%)	F	IP41
SGL21A-111P7 1150	1150	1.75	Φ340	8×Φ8×12	29	650	198	52.8	13.5	32 S5(40%)	F	IP41
SGL21A-112P0 1150	1150	2.0	Φ340	8×Φ8×12	33.1	650	225	60	15.3	32 S5(40%)	F	IP41

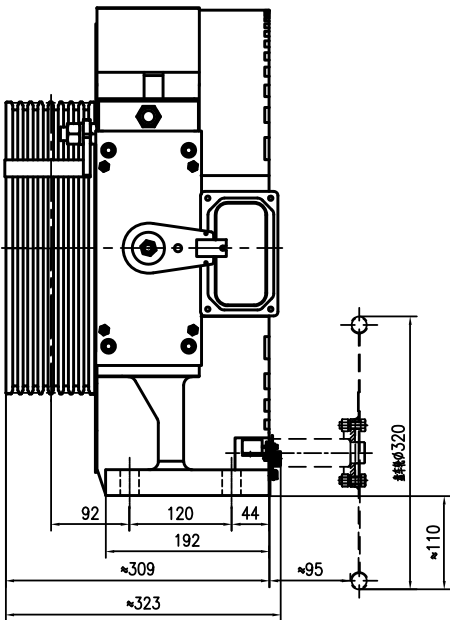

REMARK
The machine can be configured with the remote manual brake release with 4-meter cable.